

Typ podlahy

ISO 26986

Vinylová podlaha

Třída zátěže

ISO 10874



23



32

Třída

Popis



ISO 24346
(EN 428)

3,00 mm



ISO 24340
(EN 429)

0,35 mm



ISO 24341
(EN 426)

25 m
4+3+2m



ISO 23997
(EN 430)

2,170 kg/m²



EN 660-2
Třída otěru

T



EN 425
Kolečkové židle

OK



EN ISO 717/2
Kročeový útlum

cca 19 dB



EN 433
Zbytkový otlak

≤ 0,20 mm

Ostatní parametry



ISO 105/B02
Barevná stálost

≥ 6



Protiskuz
EN 13893
DIN 51130

μ ≥ 0,30
R10



Reakce na oheň
EN 13501-1
Report N° :

Cfl-s1
RA10-0252



ISO 23999
(EN 434)
Rozměrová stálost

≤ 0,40 %



Recyklovatelný

OK



EN 1815
Sklon ke vzniku
statické elektřiny

≤ 2 kV




ISO 10456
(EN 12524)
Teplotní prostupnost
podlahové vytápění

0,05 m²/kW



**Chemická
odolnost**

OK

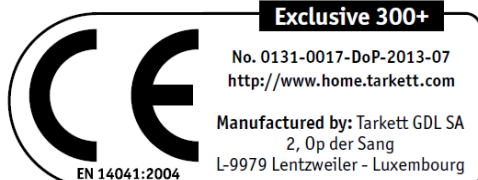

*except recycled content

*TVOC AT 28 DAYS